


PRODUCT

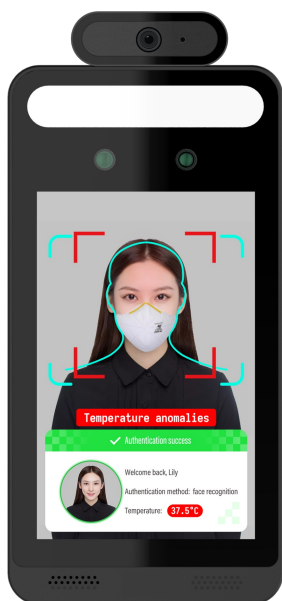

FV-PRO-2128TM - 2MP HD Temperature Measurement & Face Recognition Terminal

Simple Plug and Play or use with the N308B1-8P Smart Management POE NVR

8 inch LCD screen

IR body temperature measurement

High-accuracy (+/- 0.3°C)

Non-contact body temperature measurement

Human-sounding voice prompt

Real-time face mask detection

Face liveness detection technology

distinguishing real faces from non-real face spoof attacks

Highly accurate face recognition using deep learning algorithm

Stand-alone device, ready for networking

Detection up to 2m away

Door Lock output, NO/NC(optional), delay setting supported

Please see our Demo Video. Note the Human Voice Prompt is different to the video to Suit the English Market

DETAILS

Please see our Demo Video. Note the Human Voice Prompt will be different to the video to Suit the English Market

ADDITIONAL INFORMATION

Alarm Inputs / Relay Outputs	2ch / 2ch
Audio Inputs	1CH built-in MIC, 2-way Talk (noise reduction and echo cancellation)
BLC/SSDR (WDR)	120db
Brightness	500 lux
Contrast Ratio	contrast: 500:1

Dimensions	301.8x138.6x34.2
Lens	2MP dual-lens, f=3.97mm @ F1.6
Model	FV-PRO-2128TM
Operating Temperature	32~43°C Range
Power	12V @1A
Power Consumption	<12W
RS485 Interface	RS485x1 (half duplex)
Record Facilities	1 micro SD card slot, up to 128G
Resolution (Best)	resolution: 1280x800
Screen Size	8inch LCD screen;
Storage Media & Capacity	8Gb DDR3 +16GB EMMC
Weight(Cameras)	Approx. 1.2KG